


Lots 48/49 Storm Sewer Data Table

Str./Pipe No.	Size	Description	Length	Slope	US IE	DS IE	FG/RIM
Ex. MH	-	-	-	-	-	as-is	Back of Curb
P-201	36"	RCP	7.00	0.14%	380.02	380.01	-
P-202	36"	RCP	144.00	0.03%	380.01	379.96	-

Lot 49 Storm Sewer Notes:

Developer to remove and replace existing manhole and flared end section as indicated. Once removed and prior to replacement, the structures must be inspected and found to be in good condition by the County Engineer. Should the structures not be found to be in good condition, developer must use structures approved by the County Engineer.

The existing 36" RCP that runs between lots 48 and 49 shall be vacated in place. After removing the manhole and flared end section, both ends of the pipe shall be capped using grout. The County Engineer must inspect and approve the grouted caps prior to contractor backfilling.

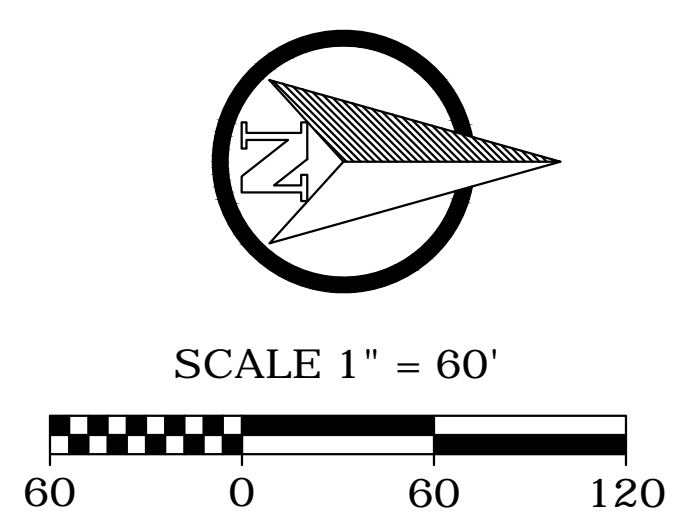

References provided in drawings of records to be used as part of the construction with the specified project. Morley and Associates retains all common law, statutory law and other rights, including copyright. No drawings or electronic files shall be used by any other person or firm without the written prior consent of Morley and Associates. All drawings are the property of Morley and Associates. Any reproduction or use of any drawings without the written prior consent of Morley and Associates shall be held liable for any and all damages. If differences exist between electronic files and the signed and sealed hard copy drawings, the hard copy shall govern.

No.	By	Date	Description

