


Curve Table

CURVE	RADIUS	ARC LENGTH	CHORD LENGTH	CHORD BEARING	DELTA ANGLE	TANGENT
CURVE#1	100.00'	49.93'	99.41'	N 70°45'11" W	28°36'22"	25.50'
CURVE#2	100.00'	93.82'	90.42'	S 68°03'56" W	53°45'23"	50.69'
CURVE#3	150.00'	36.96'	36.66'	S 48°14'45" W	14°07'01"	16.57'
CURVE#4	100.00'	35.10'	34.92'	S 84°53'21" W	20°06'33"	17.73'
CURVE#5	50.00'	60.65'	57.00'	S 53°19'29" E	69°30'04"	34.69'
CURVE#6	200.00'	22.19'	21.09'	S 16°31'03" W	63°21'57"	123.44'
CURVE#7	200.00'	212.31'	202.48'	S 45°34'38" E	60°49'25"	117.39'
CURVE#8	200.00'	212.31'	202.48'	S 45°34'38" E	60°49'25"	117.39'
CURVE#9	200.00'	174.74'	169.24'	S 08°51'53" W	50°03'38"	93.39'
CURVE#10	200.00'	172.26'	166.98'	S 10°13'16" W	49°20'59"	91.88'
CURVE#11	75.00'	96.37'	89.88'	S 51°15'50" E	73°37'21"	56.13'
CURVE#12	150.00'	102.78'	100.78'	N 17°17'18" W	39°15'37"	53.50'
CURVE#13	200.00'	134.39'	131.88'	N 17°40'06" W	38°30'01"	69.84'
CURVE#14	200.00'	145.39'	142.21'	N 22°24'27" E	41°39'04"	76.08'
CURVE#15	200.00'	145.39'	142.21'	N 22°24'27" E	41°39'04"	76.08'
CURVE#16	200.00'	71.66'	71.28'	N 08°41'00" W	20°31'49"	36.22'
CURVE#17	200.00'	8.70'	8.70'	N 20°11'39" W	02°29'29"	4.35'


Written dimensions on these drawings shall have precedence over graphic dimensions. Conditions on the job and SITECON, Inc. must be notified of any variations from the dimensions and conditions shown by these drawings.

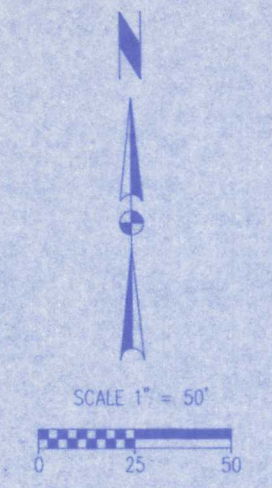

SITECON, Inc.
 Engineers-Surveyors
 10335 Hedden Rd. Suite 2
 Evansville, Indiana 47725
 (812) 868-0877

Project: Havenwood Meadows
 Sheet Title: STREETS ELEVEN/TWELVE

No.	By	Date	Description
1	KP	8-23-04	REVISE STREET ELEVEN
2	KP	4-23-04	CHANGES PER CO. ENGINEERS' REQUESTS

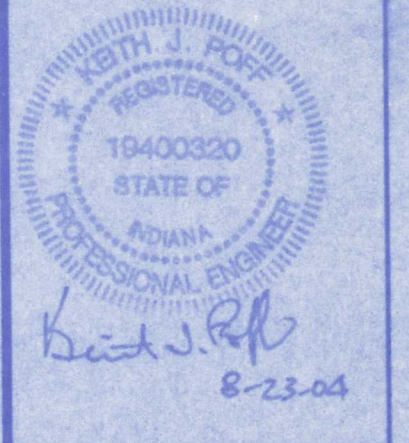

Scale: 1"=50'
 Designed By: NRM Job Number: 465-04-1
 Drawn By: NRM Date: 03-03-04

Filename: PROFILE-STREET 12.dwg
 Sheet Number: RP-6