

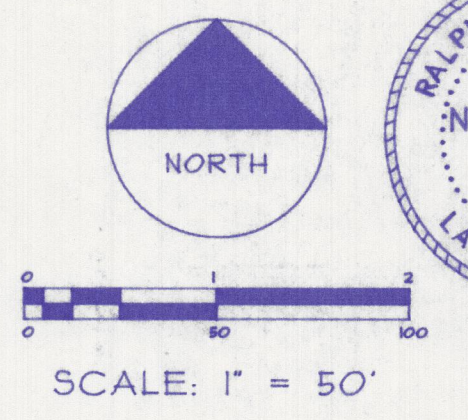


William J. Wittenkindt Jr.
12431 Red Gate Road
Evansville, Indiana 47711

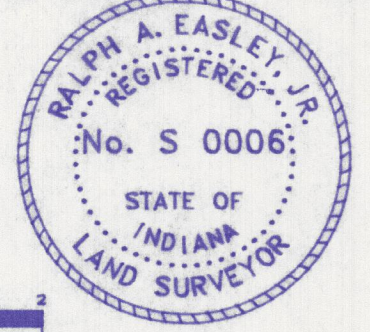


Ralph A. Easley, Jr.
RALPH A. EASLEY, JR.
LAND SURVEYOR
INDIANA REG. S 0006

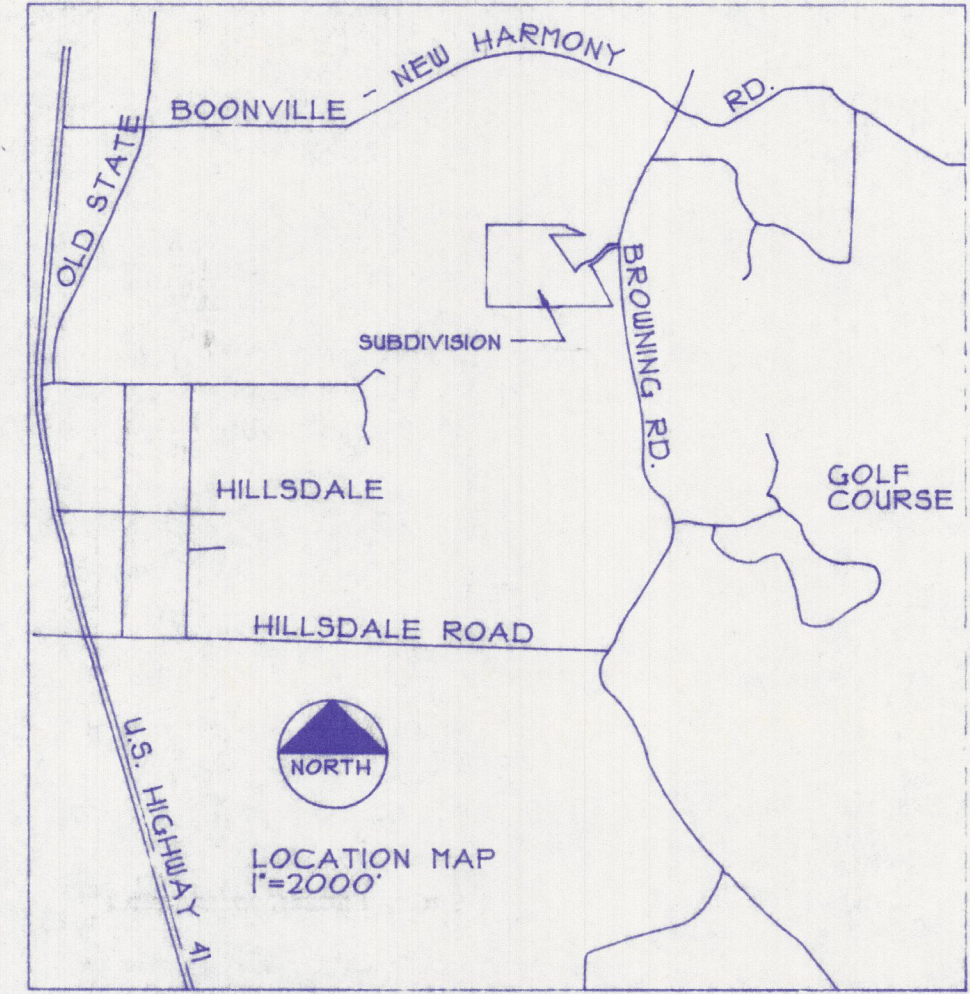

ALEXANDER ESTATES

- GENERAL NOTES:**
- OWNER/DEVELOPER, TOM AND SHERRIE ALEXANDER, 1212 BROWNING RD. EVANSVILLE, INDIANA 47711, 812/871-3211
 - UTILITIES, WATER, GAS, AND ELECTRIC ARE AVAILABLE
 - EROSION CONTROL:
 - SLOPES 0% TO 4% SHALL BE MULCHED
 - SEEDS: 100% RYE GRASS WHICH WILL BE USED FOR FALL PLANTING WITHIN 45 DAYS OF DISTURBANCE OF SOIL AND MUST REMAIN IN PLACE UNTIL FINAL GRADING AND SHAPING. SLOPES OF MORE THAN 4% SHALL HAVE STRAW BALES AND/OR EROSION CONTROL BLANKETS IN PLACE WITHIN 45 DAYS OF DISTURBANCE OF SOIL AND MUST REMAIN IN PLACE UNTIL FINAL GRADING AND SHAPING
 - DITCH GRADING, SLOPES OF 0% TO 2% SHALL BE MULCHED AND SEEDED WITHIN 45 DAYS OF CONSTRUCTION. SLOPES OF 2% TO 8% SHALL BE SODDED OR STABILIZED WITH AN EROSION CONTROL MAT AT COMPLETION OF DITCH GRADING. SLOPES OVER 8% REQUIRE RIP RAP CONCRETE CHANNEL LINER OR OTHER APPROVED BY VANDERBURGH COUNTY DRAINAGE BOARD STABILIZATION AT COMPLETION OF DITCH GRADING IF TOTAL DITCH LENGTH AT THIS POINT IS GREATER THAN 100 FEET
 - ALL APPROPRIATE MEANS SHALL BE USED TO PREVENT SEDIMENTATION FROM LEAVING THE SITE DURING CONSTRUCTION OF ANY IMPROVEMENT WITHIN THE SUBDIVISION
 - ZONING: ALL SURROUNDING PROPERTY IS ZONED AG. PROPOSED SUBDIVISION IS ZONED AG.
 - FLOOD PLAIN DATA: THE PROPERTY IS NOT LOCATED WITHIN 100-YEAR FLOOD PLAIN ZONE ACCORDING TO FIRM PANEL IS 4 25, DATED AUGUST 5, 1991 FOR VANDERBURGH COUNTY, INDIANA.
 - SOIL CLASSIFICATIONS:
 - HoB2: HEISNER SILT LOAM, 2 TO 6%, ERODED
 - S4: STENDAL SILT LOAM
 - WeB2: WELLSTON SILT LOAM 12 TO 18% SLOPES, ERODED
 - ZaD3: ZANESVILLE SILT LOAM, 12 TO 16% SLOPES, SEVERELY ERODED
 - ZaC3: ZANESVILLE SILT LOAM, 12 TO 16% SLOPES, SEVERELY ERODED
 - ENCROACHMENT WITHIN OPEN DRAINAGE CHANNELS, UNDERGROUND DRAINAGE CONDUITS OR DESIGNATED EASEMENTS BY FENCES, TREES, SHRUBS, GARDENS, VEGETATION (OTHER THAN GRASS) OR BY PERMANENT STRUCTURES OTHER THAN THOSE DESIGNATED BY THE DRAINAGE PLAN FOR THE SUBDIVISION IS PROHIBITED.
 - ALL CORNERS ARE 5/8" IRON ROD (I.S. 50006) UNLESS OTHERWISE NOTED
 - THE LOT OWNERS ASSOCIATION SHALL BE RESPONSIBLE INCLUDING FINANCIALLY FOR THE MAINTENANCE AND REPAIR OF THE ENTIRE STORM WATER DRAINAGE SYSTEM, ITS PARTS, AND EASEMENTS WITHIN OR ATTACHED TO THIS SUBDIVISION AND OUTSIDE OF COUNTY ACCEPTED ROAD RIGHT OF WAY INCLUDING:
 - MOVING GRASS WEEDS & MAINTAINING THE DESIGNED COVER OF THE WATERWAYS, STORAGE BASINS AND EASEMENTS IN ACCORDANCE WITH APPLICABLE ORDINANCES
 - KEEPING ALL PARTS OF THE STORM WATER DRAINAGE SYSTEM OPERATING AT ALL TIMES AS DESIGNED AND AS CONSTRUCTED, AND FREE OF ALL TRASH, DEBRIS, AND OBSTRUCTIONS TO THE FLOW OF WATER
 - KEEPING THE CHANNELS, EMBANKMENTS, SHORELINES AND BOTTOM OF WATERWAYS AND BASINS FREE OF ALL EROSION AND SEDIMENTATION
 - MAINTAINING AND REPAIRING THE STORM WATER DRAINAGE SYSTEM IN ACCORDANCE WITH THE CONDITIONS DESCRIBED ON THE APPROVED STREET AND/OR DRAINAGE PLANS ON FILE IN THE COUNTY SURVEYOR'S OFFICE AND/OR THE COUNTY ENGINEER'S OFFICE AND IN COMPLIANCE WITH THE COUNTY DRAINAGE ORDINANCE
 - PREVENTING ALL PERSONS OR PARTIES FROM CAUSING ANY UNAUTHORIZED ALTERATIONS, OBSTRUCTIONS, OR DETRIMENTAL ACTIONS FROM OCCURRING TO ANY PART OF THE STORM WATER DRAINAGE SYSTEM AND EASEMENTS WITHIN OR ATTACHED TO THIS SUBDIVISION
 - NOTICE: ANY PIPE, FENCE WALL, BUILDING, PATIO, PLANTING STORED MATERIAL, EXCAVATION, FILL, OR OTHER CONSTRUCTION, IMPROVEMENT, ADDITION TO OR ALTERATION OF THE LAND WITHIN A DRAINAGE EASEMENT IN THIS SUBDIVISION REQUIRES THE PRIOR WRITTEN APPROVAL OF THE COUNTY DRAINAGE BOARD
 - DAM MAINTENANCE PROCEDURES SHALL BE MADE PART OF LOT OWNERS ASSOCIATION PACKAGE.

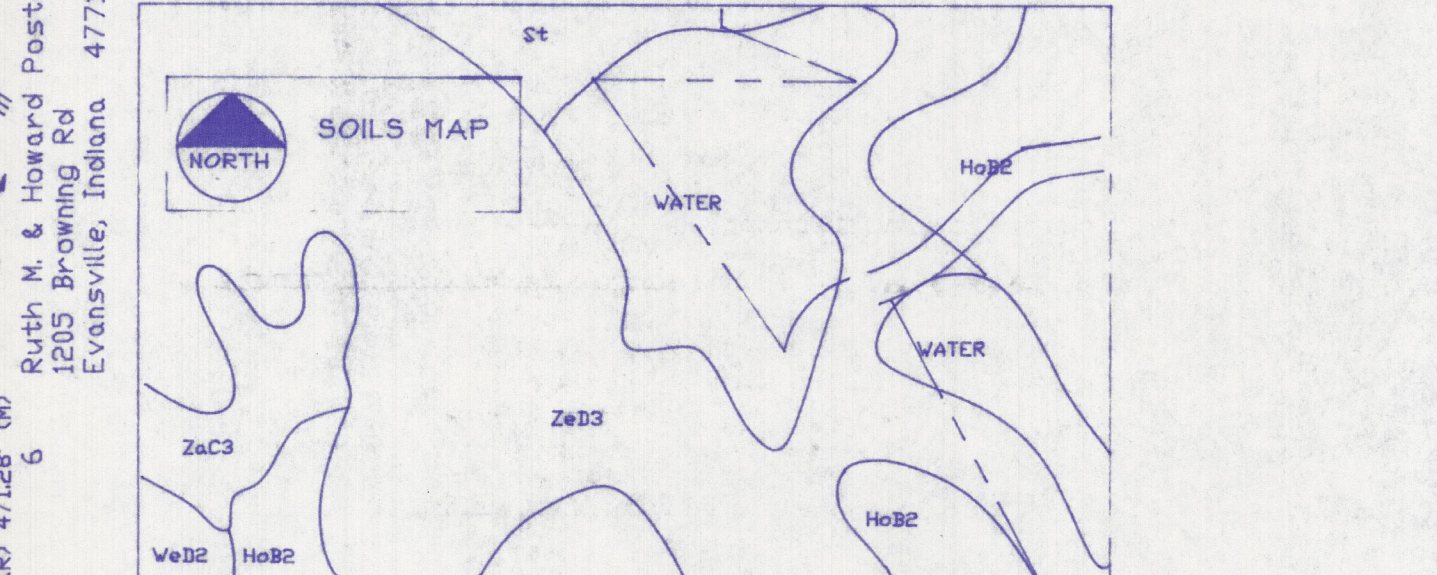


THE UNDERSIGNED (OWNER) OF SAID REAL ESTATE SHOWN & DESCRIBED HEREIN DOES HEREBY PLOT & DESIGNATE THE SAME AS ALEXANDER ESTATE. ALL ROADS SHOWN & NOT PREVIOUSLY DEDICATED ARE HEREBY DEDICATED TO PUBLIC USE.

STRIPS OF GROUND, OF THE WIDTH SHOWN ON THIS PLAN & MARKED "PUBLIC UTILITY EASEMENT", ARE HEREBY RESERVED FOR THE INSTALLATION, MAINTENANCE, OPERATION, ENLARGEMENT & REPAIR OF STRUCTURES OTHER THAN SUCH FACILITIES SHALL BE ERECTED WITHIN SAID STRIPS OF LAND, ANY FENCES ERECTED WITHIN OR ACROSS SAID EASEMENT SHALL BE SUBJECT TO THE RIGHT OF THE UTILITIES TO ACCESS & USE THE EASEMENTS

STRIPS OF GROUND MARKED "PUBLIC UTILITY & DRAINAGE EASEMENT" ARE DEDICATED FOR SURFACE WATER & OR SUBSURFACE WATER DRAINAGE IN ADDITION TO PUBLIC UTILITIES PROVIDED HOWEVER, THAT NO ABOVE GROUND PARTS OF SUCH UTILITY FACILITIES SHALL BE PLACED WITHIN THE DITCHES OR SWALES IN SUCH A MANNER AS TO IMPEDE THE FLOW OF WATER.

STRIPS OF GROUND MARKED "DRAINAGE EASEMENT" ARE DEDICATED FOR SURFACE WATER AND OR SUBSURFACE WATER DRAINAGE IN ADDITION TO PUBLIC UTILITIES PROVIDED HOWEVER, THAT NO ABOVE GROUND PARTS OF SUCH UTILITY FACILITIES ARE HEREBY PERMITTED TO CROSS SUCH FOUND STONE S.E. CORNER DRAINAGE EASEMENTS WITH UTILITY FACILITIES AND PROVIDED THAT SUCH STRIPS OF GROUND SHALL BE PLACED IN SUCH MANNER AS TO IMPEDE FLOW.

CURVE	LENGTH	DELTA	RADIUS	TANGENT
C1	93.86'	38°27'13"	139.85'	48.77'
C2	12.28'	28°24'00"	226.53'	57.32'
C3	120.34'	62°02'00"	111.15'	66.83'
C4	133.17'	80°18'50"	95.00'	80.16'

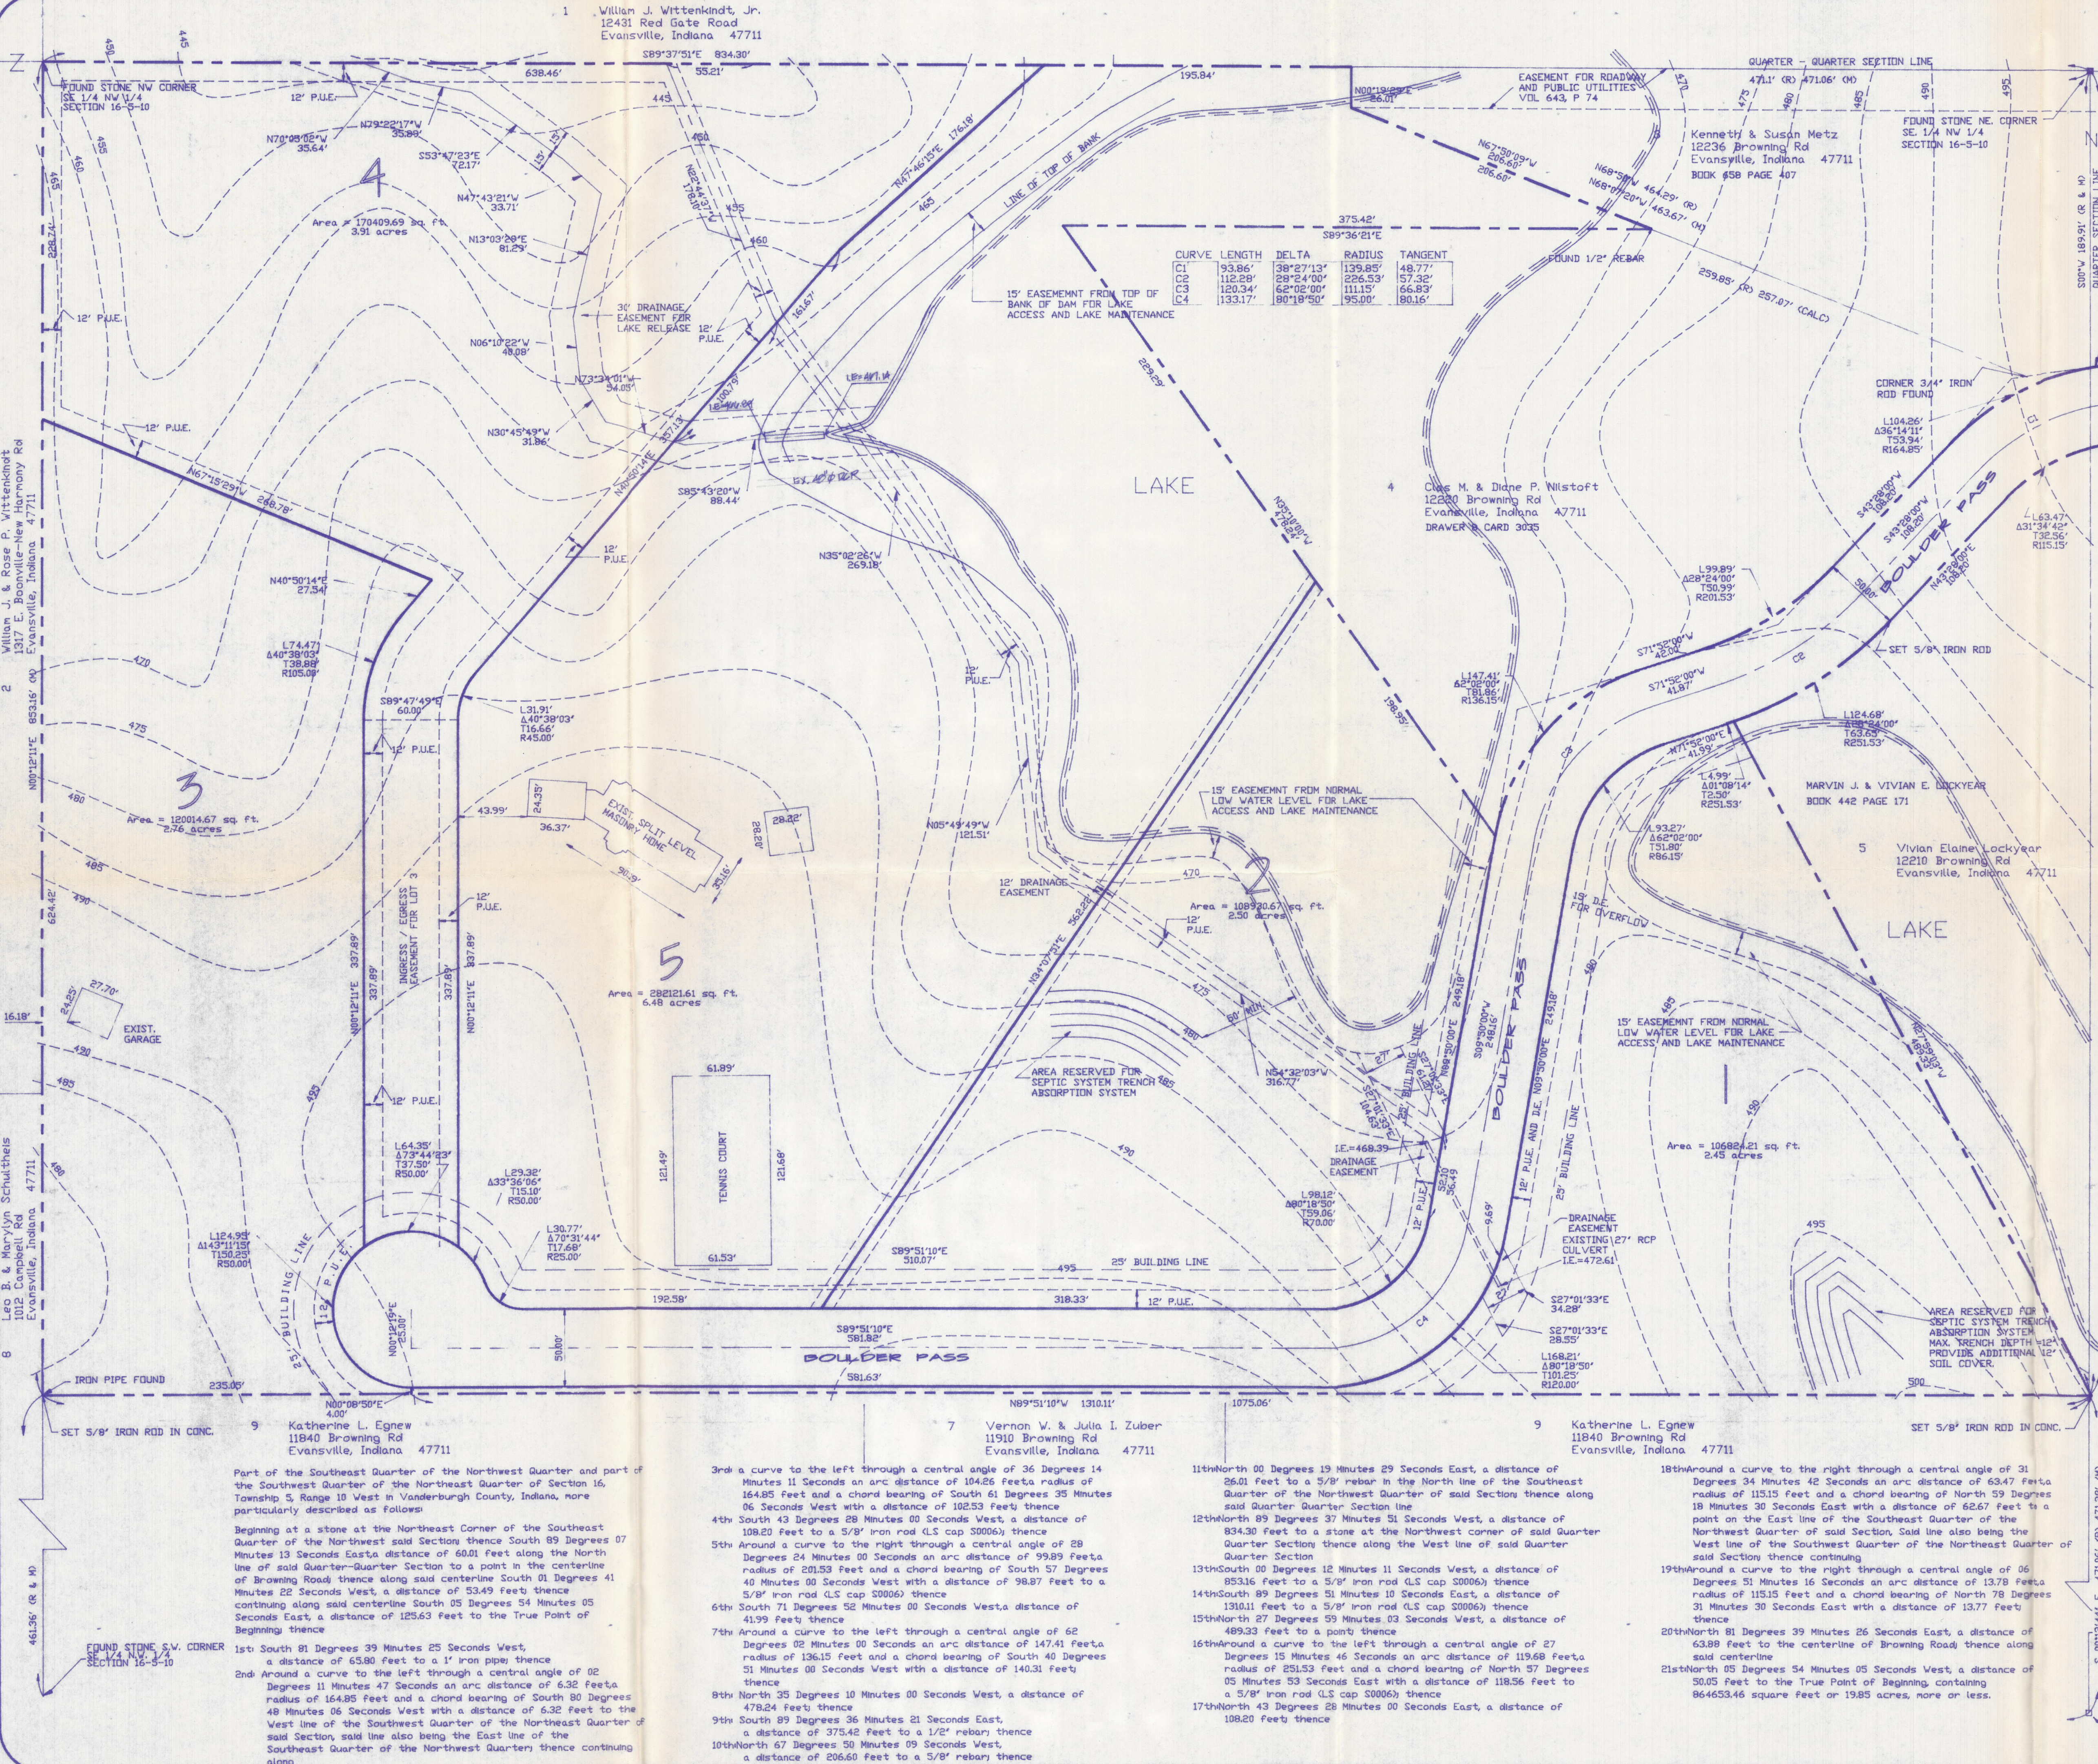

Part of the Southeast Quarter of the Northwest Quarter and part of the Southwest Quarter of the Northeast Quarter of Section 16, Township 5, Range 10 West in Vanderburgh County, Indiana, more particularly described as follows:

Beginning at a stone at the Northeast Corner of the Southeast Quarter of the Northwest said Section thence South 89 Degrees 07 Minutes 13 Seconds East a distance of 60.01 Feet along the North line of said Quarter-Quarter Section to a point in the centerline of Browning Road thence along said centerline South 01 Degrees 41 Minutes 22 Seconds West, a distance of 53.49 Feet thence continuing along said centerline South 05 Degrees 54 Minutes 05 Seconds East, a distance of 125.63 Feet to the True Point of Beginning thence

- 1st South 81 Degrees 39 Minutes 25 Seconds West, a distance of 65.80 Feet to a 1" iron pipe thence
- 2nd Around a curve to the left through a central angle of 02 Degrees 11 Minutes 47 Seconds an arc distance of 6.32 Feet a radius of 164.85 Feet and a chord bearing of South 57 Degrees 40 Minutes 00 Seconds West with a distance of 6.32 Feet to the West line of the Southwest Quarter of the Northeast Quarter of said Section, said line also being the East line of the Southeast Quarter of the Northwest Quarter, thence continuing along
- 3rd a curve to the left through a central angle of 36 Degrees 14 Minutes 11 Seconds an arc distance of 104.26 Feet a radius of 164.85 Feet and a chord bearing of South 61 Degrees 35 Minutes 06 Seconds West with a distance of 102.53 Feet thence
- 4th South 43 Degrees 28 Minutes 00 Seconds West, a distance of 108.20 Feet to a 5/8" iron rod (L.S. cap S0006); thence
- 5th Around a curve to the right through a central angle of 28 Degrees 24 Minutes 00 Seconds an arc distance of 99.89 Feet a radius of 201.53 Feet and a chord bearing of South 57 Degrees 40 Minutes 00 Seconds West with a distance of 98.87 Feet to a 5/8" iron rod (L.S. cap S0006); thence
- 6th South 71 Degrees 52 Minutes 00 Seconds West, a distance of 41.99 Feet thence
- 7th Around a curve to the left through a central angle of 62 Degrees 02 Minutes 00 Seconds an arc distance of 147.41 Feet a radius of 136.15 Feet and a chord bearing of South 40 Degrees 51 Minutes 00 Seconds West with a distance of 140.31 Feet thence
- 8th North 35 Degrees 10 Minutes 00 Seconds West, a distance of 478.24 Feet thence
- 9th South 89 Degrees 36 Minutes 21 Seconds East, a distance of 375.42 Feet to a 1/2" rebar; thence
- 10th North 67 Degrees 50 Minutes 09 Seconds West, a distance of 206.60 Feet to a 5/8" rebar; thence
- 11th North 00 Degrees 19 Minutes 29 Seconds East, a distance of 26.01 Feet to a 5/8" rebar in the North line of the Southeast Quarter of the Northwest Quarter of said Section thence along said Quarter-Quarter Section line
- 12th North 89 Degrees 37 Minutes 51 Seconds West, a distance of 834.30 Feet to a stone at the Northwest corner of said Quarter-Quarter Section thence along the West line of said Quarter-Quarter Section
- 13th South 00 Degrees 12 Minutes 11 Seconds West, a distance of 95.316 Feet to a 5/8" iron rod (L.S. cap S0006); thence
- 14th South 89 Degrees 51 Minutes 10 Seconds East, a distance of 1310.11 Feet to a 5/8" iron rod (L.S. cap S0006); thence
- 15th North 27 Degrees 59 Minutes 03 Seconds West, a distance of 489.33 Feet to a point thence
- 16th Around a curve to the left through a central angle of 27 Degrees 15 Minutes 46 Seconds an arc distance of 119.68 Feet a radius of 251.53 Feet and a chord bearing of North 57 Degrees 05 Minutes 53 Seconds East with a distance of 118.56 Feet to a 5/8" iron rod (L.S. cap S0006); thence
- 17th North 43 Degrees 28 Minutes 00 Seconds East, a distance of 108.20 Feet thence
- 18th Around a curve to the right through a central angle of 31 Degrees 34 Minutes 42 Seconds an arc distance of 63.47 Feet a radius of 115.15 Feet and a chord bearing of North 59 Degrees 18 Minutes 30 Seconds East with a distance of 62.67 Feet to a point on the East line of the Southeast Quarter of the Northwest Quarter of said Section, said line also being the West line of the Southwest Quarter of the Northeast Quarter of said Section thence continuing
- 19th Around a curve to the right through a central angle of 06 Degrees 51 Minutes 16 Seconds an arc distance of 13.78 Feet a radius of 115.15 Feet and a chord bearing of North 78 Degrees 31 Minutes 30 Seconds East with a distance of 13.77 Feet thence
- 20th North 81 Degrees 39 Minutes 26 Seconds East, a distance of 63.88 Feet to the centerline of Browning Road thence along said centerline
- 21st North 05 Degrees 54 Minutes 05 Seconds West, a distance of 50.05 Feet to the True Point of Beginning, containing 864653.46 square feet or 19.85 acres, more or less.